

DLS-27/36/60 TOUCH II LOW SPIN WASHER EXTRACTORS



TOUCH II

User friendly and totally programmable 7" Touch II
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor:
G-FACTOR 200 for low spin washers
(G-FACTOR 150 for DLS-60)



EFFICIENCY

Intelligent Weighing System
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø460 (for DLS-27) and
Ø560 (for DLS-36/60)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors,
electronic devices, gear
Technical menu: traceability, error diagnosis



OTHERS


Grey skinplate outercasing.
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments.
Electronic control of imbalance with frequency
control.
LOADING AID feature: water and rotation control.
CE, WRAS and EAC approved product. Option ETL



OPTIONS

- Double drain
- External double drain 3"
- Normally closed valve
- Silicon gasket (for DLS-27)
- Water RE-CYCLE: recirculation of bath water
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- DomusConnect communication
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- SLUICE: model with 8mm drum holes (for DLS-26/36)
- Anchoring base
- Maritime voltage for electric models: 440V III 50/60 Hz
No neutral
- Voltage 230 V III for DLS-60
- Coin / token kit
- Delayed door opening in case of power outage

TECHNICAL DATA	UNIT.	DLS-26 TOUCH II		DLS-36 TOUCH II		DLS-60 TOUCH II	
DRUM							
Load capacity 1:9 / 1:10	Kg	28/25		39/35		67/60	
Volume	l	250		350		600	
Diameter	mm	770		860		1.048	
Depth	mm	530		602		684	
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	48/682		45/644		42,5/505	
G Factor	-	200		200		150	
Maximum force transmitted	KN	3,53 ±6		4,59 ±8		9,12 ±15	
Frequency-dynamic force	Hz	8,02		7,58		6,93	
Noise level	dB	<70		<70		<70	
Coin laundry version	-	Yes		Yes		No	
Double drain	-	Opt		Opt		Opt	
Weighing system /Tilting system	-	No/No		No/No		No/No	
SLUICE - Option 8mm holes drum	-	Yes		Yes		No	
DOOR							
Height center door / Height door	mm	700/400		735/440		900/540	
Diameter	mm	460		560		560	
POWER							
Motor	kW	3		4		5,5	
Electric heating power	kW	18		21		28,8	
Total electric power (electric model)	kW	19		22		31,3	
Total electric power (hww, steam model)	kW	3		4		5,5	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER	ELECTRIC	STEAM / HOT WATER
Tension 230V- I + N + T	N° x mm2 / A	-	3 x 1,5 / 16A	-	3 x 1,5 / 16A	-	-
Tension 230V- III + T	N° x mm2 / A	3 x 10 / 50A	-	3 x 16 / 63A	-	3 x 25 / 100A	3 x 6 / 32A
Tension 400V- III + N + T	N° x mm2 / A	3 x 4 / 32A	-	3 x 6 / 40A	-	3 x 16 / 63A	3 x 4 / 10A
Steam inlet (Steam model)	inch	3/4"		3/4"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	15		18		21	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm²	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	164,8		199,6		627,9	
Drain	mm/inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
DIMENSIONS / PACKING DIMENSIONS							
Width /Width	mm	884/930		979/1.050		1.225/1.360	
Depth / Depth	mm	1.011/1.150		1.066/1.250		1.279/1.480	
Height / Height	mm	1.340/1.523		1.411/1.600		1.640/1.880	
Net weight / Gross weight	kg	340/370		473/503		930/1.050	
Volume	m3	1,6		2,1		3,73	

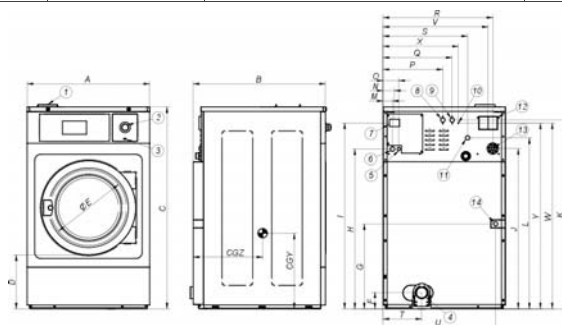

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRICAL CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLS-26	884	965	1.340	400	460	145	548	1.063	1.230	1.065	1.250	1.135	61	74	101	428	508	801	639	268	820	771	1.220	600	1.280	479	543
DLS-36	979	1.066	1.411	370	560	147	623	1.139	1.307	1.116	1.250	1.135	61	74	101	481	561	861	673	262	917	831	1.281	624	1.367	635	682
DLS-60	1.225	1.279	1.640	540	560	140	984	1.368	1.536	1.306	1.551	1.318	61	74	101	651	731	1.110	869	270	1.163	1.080	1.470	992	1.595	644	972